


START SURFACE SLIM IP54 ROUND 4000LM 2CCT D WH

Code article 0043513

SYLVANIA


STARTTM

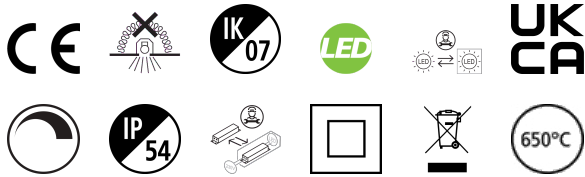

Ceiling / wall round luminaire with integrated LED. Perfect solution for corridors, circulation areas or bathrooms. Even and uniform light in a slim but robust design. Power 35W, lumen output 4000 lumens, lumen efficacy 114 lm/W, dual color temperature (3000K/4000K). Supplied with phase dimming driver (leading edge/trailing edge). Mains Voltage 220-240V~. Body Size: 400mm diameter x 53mm height. IK07, IP54 Protection rating. PC Polycarbonate Opal diffuser. Low maintenance with 58000 hours LED lifespan expectancy. Warranty: 5 years.

Atouts techniques

Dimensions (mm)

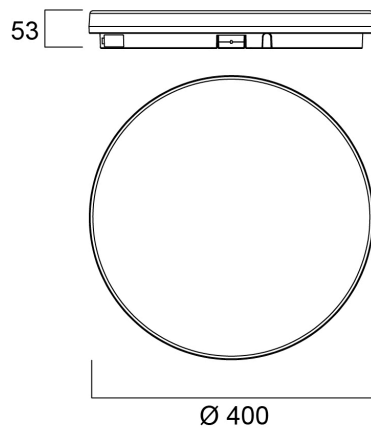


Photométrie

| Distance [m] | Cone diameter [m] | E171 | E170 | E172 | E173 | E174 |
|--------------|-------------------|------|------|------|------|------|
| 0.5 | 1.44 | 1.44 | 1.44 | 1.44 | 1.44 | 4574 |
| 1.0 | 2.88 | 2.88 | 2.88 | 2.88 | 2.88 | 1244 |
| 1.5 | 4.32 | 4.32 | 4.32 | 4.32 | 4.32 | 583 |
| 2.0 | 5.76 | 5.76 | 5.76 | 5.76 | 5.76 | 311 |
| 2.5 | 7.20 | 7.20 | 7.20 | 7.20 | 7.20 | 199 |
| 3.0 | 8.64 | 8.64 | 8.64 | 8.64 | 8.64 | 133 |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 110.0°)
— C90 - C270 (Half beam angle: 110.4°)



START SURFACE SLIM IP54 ROUND 4000LM 2CCT D WH

Code article 0043513

SYLVANIA

Données générales

| | |
|---|--|
| Nom du produit | START SURFACE SLIM IP54 ROUND 4000LM 2CCT D WH |
| Technologie | LED |
| Cap/Base | N/A |
| Housing | PC Polycarbonate |
| Montage | Ceiling surface mounting, Wall surface mounted |
| Built in presence detector | NONE |
| General application | Hospitality |
| Operating temperature range (°C) | -20°C...+40°C |
| Performance ambient temperature Tq (°C) | 25 |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC002892 |
| Numéro virtuel FI | 4278399 |
| Warranty | 5 ans |

Données optiques

| | |
|---------------------------------|--------------------------------|
| Fixture luminous flux (lm) | 4000 |
| Luminaire efficacy (lm/W) | 114 |
| Couleur de lumière | Warm White or Neutral White |
| IRC (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM4 |
| Beam Angle (°) | 120 |
| Distribution type | Diffuse |
| Photobiological Risk Group | RG0 |

Caractéristiques électriques

| | |
|--|-----------------------------------|
| Consommation électrique totale (W) | 35 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| Lamp power factor | 0.9 |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x % | 18 |
| Electrical protection | Class II |
| Control gear required | No |
| Type d'appareillage | LED driver constant current |
| Dimmable | Yes |
| Dimming method | Mains: leading / trailing edge |
| Drive current (mA) | 275 |
| Courant d'appel (A) | 7.9 |
| Inrush Duration (µs) | 400 |
| Energy Efficiency Class (A->G) of contained light source | D |
| Nominal Frequency (Hz) | 50/60Hz |
| LED Flickering Rate | Ultra low (5% or less) |
| Max. products per 16A C Breaker | 50 |
| Max. products per 16A B Breaker | 32 |
| Connectable conductor cross section - Min (mm ²) | 0.75 |
| Connectable conductor cross section - Max (mm ²) | 2.5 |

Durée de vie

| | |
|------------------|-------|
| Lifespan L70 B50 | 58000 |
| Lifespan L80 B50 | 37000 |
| Lifespan L90 B50 | 19000 |

START SURFACE SLIM IP54 ROUND 4000LM 2CCT D WH

Code article 0043513

SYLVANIA

Données physiques

| | |
|-------------------------------|------------------|
| Housing colour | White |
| IP rating | IP54 |
| IK rating | IK07 |
| Diffuser finish | Opal |
| Diffuser material | PC Polycarbonate |
| Nominal Product Height (mm) | 53 |
| Nominal Product Diameter (mm) | 400 |
| Poids (kg) | 1.63 |

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5410288435138 |
| Longueur simple de l'emballage (cm) | 40.5 |
| Largeur simple de l'emballage (cm) | 5.8 |
| Packaging single depth (cm) | 40.7 |
| DUN14 (inner) | 15410288435135 |
| Units per outer package | 4 |
| Packaging outer length / height (cm) | 42.0 |
| Packaging outer width (cm) | 25.5 |
| Packaging outer depth (cm) | 42.5 |

Sécurité

| | |
|---|--------|
| Glow Wire Test (°C) | 650 |
| Condition de fonctionnement optimal (° C) | -20-40 |