


START SURFACE SLIM IP54 ROUND 2500LM 2CCT D WH

Code article 0043512

SYLVANIA


STARTTM

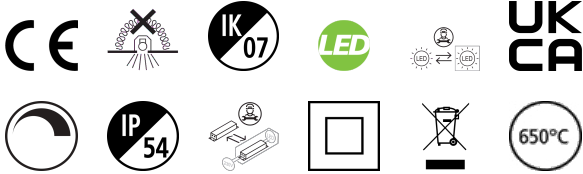

Ceiling / wall round luminaire with integrated LED. Perfect solution for corridors, circulation areas or bathrooms. Even and uniform light in a slim but robust design. Power 24W, lumen output 2500 lumens, lumen efficacy 104 lm/W, dual color temperature (3000K/4000K). Supplied with phase dimming driver (leading edge/trailing edge). Mains Voltage 220-240V~. Body Size: 330mm diameter x 53mm height. IK07, IP54 Protection rating. PC Polycarbonate Opal diffuser. Low maintenance with 58000 hours LED lifespan expectancy. Warranty: 5 years.


Atouts techniques

Dimensions (mm)

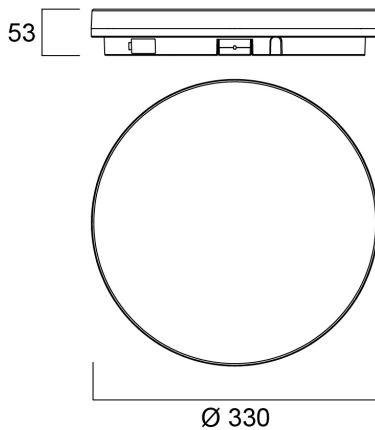

Photométrie

| | | | |
|---------------------------------------|------|-------------------|-------------|
| 0.5 | 1.64 | E171 E207 | 3302 207 |
| 1.0 | 3.28 | E171 E207 | 771 61 |
| 1.5 | 4.91 | E171 E207 | 325 41 |
| 2.0 | 6.55 | E171 E207 | 183 31 |
| 2.5 | 8.19 | E171 E207 | 117 21 |
| 3.0 | 9.83 | E171 E207 | 81 15 |
| Distance [m] | | Cone diameter [m] | |
| — C0 - C180 (Half beam angle: 117.2°) | | | |



START SURFACE SLIM IP54 ROUND 2500LM 2CCT D WH

Code article 0043512

SYLVANIA

Données générales

| | |
|-----------------------------------------|------------------------------------------------|
| Nom du produit | START SURFACE SLIM IP54 ROUND 2500LM 2CCT D WH |
| Technologie | LED |
| Cap/Base | N/A |
| Housing | PC Polycarbonate |
| Montage | Ceiling surface mounting, Wall surface mounted |
| Built in presence detector | NONE |
| General application | Hospitality |
| Operating temperature range (°C) | -20°C...+40°C |
| Performance ambient temperature Tq (°C) | 25 |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC002892 |
| Numéro virtuel FI | 4278398 |
| Warranty | 5 ans |

Données optiques

| | |
|---------------------------------|-----------------------------|
| Fixture luminous flux (lm) | 2500 |
| Luminaire efficacy (lm/W) | 104 |
| Couleur de lumière | Warm White or Neutral White |
| IRC (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM4 |
| Beam Angle (°) | 120 |
| Distribution type | Diffuse |
| Photobiological Risk Group | RG0 |

Caractéristiques électriques

| | |
|-----------------------------------------------------------------------|--------------------------------|
| Consommation électrique totale (W) | 24 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| Lamp power factor | 0.9 |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x % | 18 |
| Electrical protection | Class II |
| Control gear required | No |
| Type d'appareillage | LED driver constant current |
| Dimmable | Yes |
| Dimming method | Mains: leading / trailing edge |
| Drive current (mA) | 285 |
| Courant d'appel (A) | 8.08 |
| Inrush Duration (μ s) | 400 |
| Energy Efficiency Class (A->G) of contained light source | E |
| Nominal Frequency (Hz) | 50/60Hz |
| LED Flickering Rate | Ultra low (5% or less) |
| Max. products per 16A C Breaker | 50 |
| Max. products per 16A B Breaker | 32 |
| Connectable conductor cross section - Min (mm ²) | 0.75 |
| Connectable conductor cross section - Max (mm ²) | 2.5 |

Durée de vie

| | |
|------------------|-------|
| Lifespan L70 B50 | 58000 |
| Lifespan L80 B50 | 37000 |
| Lifespan L90 B50 | 19000 |

START SURFACE SLIM IP54 ROUND 2500LM 2CCT D WH

Code article 0043512

SYLVANIA

Données physiques

| | |
|-------------------------------|------------------|
| Housing colour | White |
| IP rating | IP54 |
| IK rating | IK07 |
| Diffuser finish | Opal |
| Diffuser material | PC Polycarbonate |
| Nominal Product Height (mm) | 53 |
| Nominal Product Diameter (mm) | 330 |
| Poids (kg) | 1.31 |

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5410288435121 |
| Longueur simple de l'emballage (cm) | 33.5 |
| Largeur simple de l'emballage (cm) | 5.8 |
| Packaging single depth (cm) | 33.7 |
| DUN14 (inner) | 15410288435128 |
| Units per outer package | 5 |
| Packaging outer length / height (cm) | 35.0 |
| Packaging outer width (cm) | 31.5 |
| Packaging outer depth (cm) | 35.5 |

Sécurité

| | |
|-------------------------------------------|--------|
| Glow Wire Test (°C) | 650 |
| Condition de fonctionnement optimal (° C) | -20-40 |